


# CFast

## 3MV2-P series

### Drawing

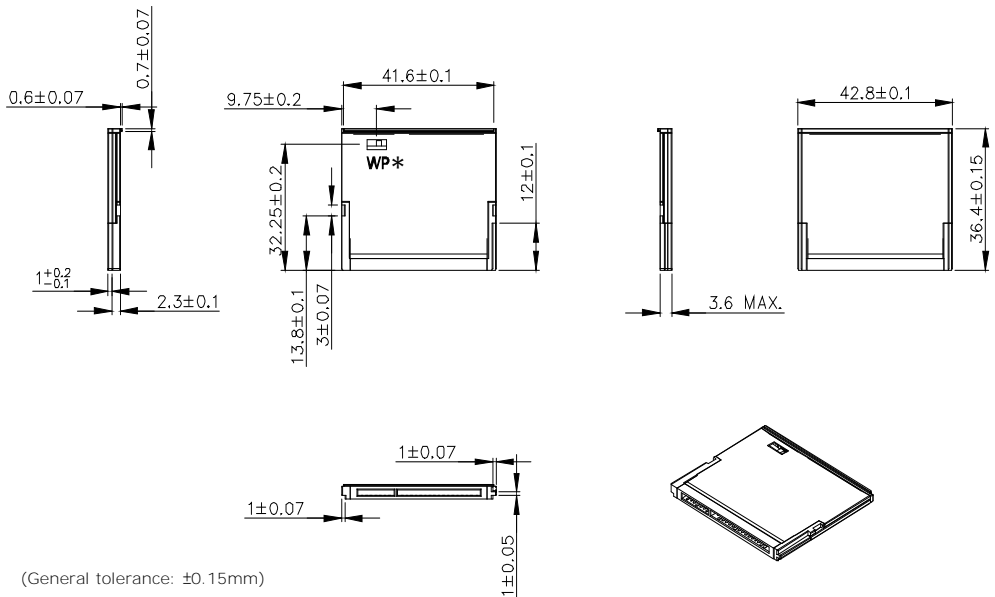

(General tolerance:  $\pm 0.15$ mm)

## Specifications

Interface	SATA III
Flash Type	MLC
Capacity	32GB~256GB
Max. Channels	4
Sequential R/W (MB/sec, max.)	560/350
Max. Power Consumption	2.5W(3.3V x 760 mA)
Thermal Sensor	ST- default / WT- default
External DRAM Buffer	Yes
H/W Write Protect	Optional*
ATA Security	√
S.M.A.R.T.	√
Dimension (WxLxH)	42.8X 36.4 X 3.6 mm
Environment	Vibration: 20G @7~2000Hz Shock: 1500G @ 0.5ms Storage Temperature: -55°C ~ +95°C MTBF: 3 million hours

## Ordering Information

Operation Temp.	32GB	64GB	128GB	256GB
Standard Grade (0°C ~ +70°C)	DVCFA-32GD81BCADC(W)	DVCFA-64GD81BCAQC(W)	DVCFA-A28D81BCAQC(W)	DVCFA-B56D81BCAQC(W)
Industrial Grade (-40°C ~ +85°C)	DVCFA-32GD81BWADC(W)	DVCFA-64GD81BWAQC(W)	DVCFA-A28D81BWAQC(W)	DVCFA-B56D81BWAQC(W)

\*H/W write protect function is optional.

(For the write protect demand, please place the order by PN: DVCFA-xxxD81BxAxCW)

\*D: Dual channel / Q: Qual channel