



IMB-1710

ATX Motherboard

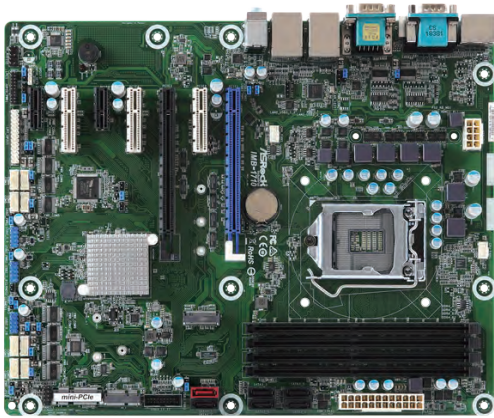

KEY FEATURES

- Intel® 9th/ 8th Gen (Coffee Lake-S) Core™ Processors with Q370 chipset
- 4 x 288-pin Long-DIMM up to 128GB* DDR4 2666 MHz
- 1 x PCIe x16 (Gen3), 1 x PCIe x8 (Gen3), 3 x PCIe x4 (Gen3), 2 x PCIe x1 (Gen3), 6 x USB 3.1 Gen1, 6 x USB 2.0, 1 x M.2 Key E, 1 x mini-PCIe, 1 x M.2 Key M, 10 x COM, 6 x SATA3
- 2 x Intel 1 Gigabit LAN
- Supports triple display, 1 x HDMI 1.4, 2 x DP 1.2, 1 x VGA
- TPM 2.0 onboard IC
- ATX PWR

SPECIFICATIONS

Form Factor

Dimensions	ATX (12-in x 9.6-in)
------------	----------------------

Processor System

CPU	Intel® 9 th / 8 th Gen (Coffee Lake-S) Core™ Processors, up to 95W
Chipset	Intel® Q370
Socket	LGA1151
BIOS	AMI SPI 128 Mbit

Memory

Technology	Dual Channel DDR4 2666 MHz
Capacity	128GB* * Intel Core i9/i7/i5 CPUs support up to 128GB (32GB per DIMM) Intel Core i3/Pentium/Celeron CPUs support up to 64GB (16GB per DIMM)
Socket	4 x 288-pin Long-DIMM

Graphics

Controller	Coffee Lake integrated graphics
HDMI	HDMI 1.4 Max resolution up to 4096x2160@24Hz
DisplayPort	DisplayPort 1.2, DP++ Max resolution up to 4096x2304@60Hz
VGA	Max resolution up to 1920x1200@60Hz
LVDS	N/A
eDP	N/A
DVI	N/A
MultiDisplay	Triple Display

Expansion Slot

PCIe	-3 x PCIe 3.0 Slots (PCIe1/PCIe2/PCIe3: single at x16 (PCIe1); dual at x8 (PCIe1) / x8 (PCIe3); triple at x8 (PCIe1) / x4 (PCIe2) / x4 (PCIe3)) -2 x PCIe 3.0 x4 Slots (PCIe4) (PCIe6) -2 x PCIe 3.0 x1 Slots (PCIe5) (PCIe7)
PCI	N/A
mini-PCIe	1 x Full/Half size with PCIe x1 and USB 2.0
M.2	1 x M.2 (Key E, 2230) with PCIe x1, USB 2.0 and CNVi for Wireless

Audio

Interface	Realtek ALC887, High Definition Audio. Line-out, Mic-in, Line-in
-----------	--

Ethernet

Controller/ Speed	LAN1: 1 x Intel® I210 with 10/100/1000 Mbps LAN2: 1 x Intel® I219LM with 10/100/1000 Mbps, supports AMT/vPro
Connector	2 x RJ-45

Rear I/O

HDMI	1 x HDMI 1.4
DisplayPort	2 x DP 1.2
VGA	1
DVI	N/A
Ethernet	2 x 1 Gigabit LAN
USB	4 x USB 3.1 (Gen1)
Audio	3 (Mic-in, Line-in, Line-out)
COM	COM1, 2(RS-232/422/485)
PS2	1

Internal Connector

USB	2 x USB 3.1 (Gen1) (1 x USB 3.1 header) 6 x USB 2.0 (3 x 2.54 pitch header)
COM	COM3, 4, 5, 6, 7, 8, 9, 10 (RS-232)
Parallel	1 (shared with GPIO)
GPIO	8 x GPI, 8 x GPO (shared with LPT header)
TPM	TPM 2.0 onboard IC
LVDS	N/A
eDP	N/A
VGA	N/A
SATA PWR Output	N/A
Speaker Header	1

Storage

M.2	1 x M.2 (Key M, 2242/2260/2280) with PCIe x4 and shared SATA3 for SSD
mSATA	N/A
SATA	6 x SATA3 (6Gb/s), SATA3_1 shared with M.2 Key M
eMMC	N/A

Watchdog Timer

Output	From Super I/O to drag RESETCON#
Interval	256 Segments, 0, 1, 2, ...255sec

Power Requirements

Input PWR	ATX PWR (24+8-pin)
Power On	AT/ATX Supported - AT : Directly PWR on as power input ready - ATX : Press button to PWR on after power input ready

Environment

Operating Temp	0°C ~ 60°C
Storage Temp	-40° C ~ 85° C
Operating Humidity	5% ~ 90%
Storage Humidity	5% ~ 90%