

# WIO A+ Server AS -1115SV-WTNRT



More details here

## Key Applications



Virtualization, Data Center Optimized, Firewall Applications, Database/Storage, Edge/Cloud Computing Services,

## Key Features

- Single Socket AMD EPYC™ 8004 Series Processor;
- 6 DIMM slots, DDR5-4800MHz memory, support up to 576GB;
- 2 PCIe 5.0 x16 FHFL; 1 PCIe 5.0 x16 LP;
- 1x dedicated IPMI LAN, 2x 10GbE BaseT LAN ports via Broadcom BCM57416 Controller;
- 10 hot-swap 2.5" drive bays support SATA(default)/NVMe/SAS drives or ;6 SATA/NVMe Hybrid with 4 SATA drives;(Optional cables or SAS controller card for NVMe and SAS drives support);
- Dual 860W Redundant Titanium Level Power Supplies;(Full redundancy based on configuration and application load);
- 2 On-board PCIe 3.0 x4 M.2 NVMe 80mm/110mm (Boot);



Form Factor	1U Rackmount Enclosure: 437 x 43 x 597mm (17.2" x 1.7" x 23.5") Package: 597 x 197 x 800mm (23.5" x 7.75" x 31.5")
Processor	Single Socket AMD EPYC™ 8004 Series Processor Up to 64C/128T
System Memory	Memory Capacity: 6 DIMM slots Up to 576GB: 6x 96 GB DRAM and 6ECC Registered RDIMM, DDR5-4800MHz Memory Type: 4800MHz ECC DDR5 RDIMM
Drive Bays	10x 2.5" hot-swap SATA/SAS/NVMe drive bays (6x 2.5" NVMe hybrid) PCIe 3.0 x4 M-key, 2280, 22110
Expansion Slots	2 PCIe 5.0 x16 FHFL slot(s) 1 PCIe 5.0 x16 LP slot(s)
On-Board Devices	NVMe: NVMe (optional) SATA: SATA (6Gbps) Chipset: System on Chip Network Connectivity: 2x 10Gb BaseT with Broadcom BCM57416
Input / Output	LAN: 2 RJ45 10 GbE LAN ports 1 RJ45 Dedicated IPMI LAN port USB: 6 USB port(s) (4 rear; 2 front) Video: 1 VGA port(s) Serial Port: 1 COM Port(s) (1 rear)

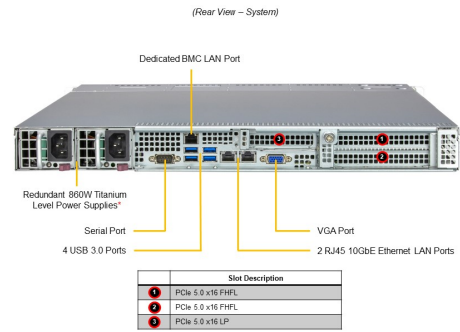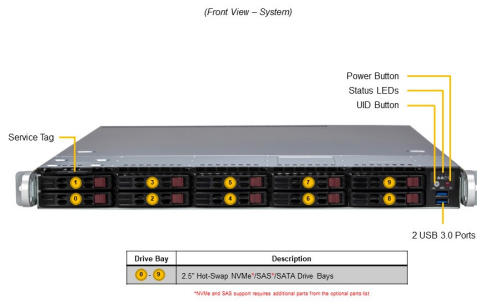

System Cooling	Fans: 6 Heavy duty counter-rotating 40x40x56mm Fan(s)
Power Supply	2x 860W Titanium Level power supplies
System BIOS	<p>BIOS Type: AMI 32MB SPI Flash EEPROM</p> <p>BIOS Features: ACPI 6.4</p> <p>SMBIOS 3.5 or later</p> <p>UEFI 2.8</p> <p>Plug and Play (PnP)</p> <p>USB Keyboard support</p>
PC Health Monitoring	<p>FAN: Fans with tachometer monitoring</p> <p>Status monitor for speed control</p> <p>Pulse Width Modulated (PWM) fan connectors</p> <p>Temperature: Monitoring for CPU and chassis environment</p> <p>Thermal Control for fan connectors</p>
Dimensions and Weight	<p>Height: 1.7" (43 mm)</p> <p>Width: 17.2" (437 mm)</p> <p>Depth: 23.5" (597 mm)</p> <p>Gross Weight: 33.5 lbs (15.2 kg)</p> <p>Net Weight: 21 lbs (9.53 kg)</p> <p>Packaging: 7.75" (H) x 23.5" (W) x 31.5" (D)</p> <p>Available Color: Black</p>
Operating Environment	<p>Operating Temperature: 10°C ~ 35°C (50°F ~ 95°F)</p> <p>Non-operating Temperature: -30°C to 60°C (-22°F to 140°F)</p> <p>Operating Relative Humidity: 8% to 80% (non-condensing)</p> <p>Non-operating Relative Humidity: 8% to 90% (non-condensing)</p>
Motherboard	<a href="#">Super H13SW-NT</a>
Chassis	CSE-116BTS-R000WNP