

CloudDC SuperServer SYS-620C-TN12R



More details here

Key Applications


Web Server, Firewall Application, Data Center Optimized, Value IaaS, Cloud Computing, Compact Server, DNS & Gateway Servers, Firewall Application, CDN, Edge Nodes,

Key Features

- Dual sockets P+ (LGA-4189) 3rd Gen Intel® Xeon® Scalable processors;
- Intel® C621A Chipset;
- 16 DIMMs up to 6TB 3DS ECC DDR4-3200: LRDIMM/RDIMM/Intel® DCPMM;
- 4 PCIe 4.0 x8 FHHL (optional: combine into 2 PCIe 4.0 x16); 2 PCIe 4.0 x16 FHHL; 2 PCIe 3.0 x2 NVMe M.2;
- Dual AIOM (OCP 3.0) slots with NCSI for networking, 1 dedicated IPMI LAN;
- 12x 3.5/2.5" hot-swap hybrid NVMe/SATA/SAS drive bays;
- 3 heavy duty fans with optimal fan speed control, 1 air shroud;
- 1200W redundant Titanium level 100-240Vac and 200-240 Vdc power supplies;
- 1 VGA, 1 COM, 2 USB 3.0 (rear);



Form Factor	2U Rackmount Enclosure: 437 x 89 x 647mm (17.2" x 3.5" x 25.5") Package: 671 x 290 x 871mm (26.4" x 11.4" x 34.3")
Processor	3rd Gen Intel® Xeon® Scalable processors Dual Socket LGA-4189 (Socket P4) supported TDP up to 270W; 3 UPI
System Memory	16 DIMM slots Up to 4 TB ECC RDIMM, DDR4-3200MHz Up to 4 TB ECC LRDIMM, DDR4-3200MHz Up to 4 TB Intel® DCPMM, DDR4-3200MHz
Drive Bays	12x 3.5" hot-swap NVMe/SATA/SAS drive bays (12x 3.5" NVMe hybrid)(NVMe drives require additional cables from the optional parts list.) 2x PCIe 3.0 x2 M-Key, 2280
Expansion Slots	4 PCIe 4.0 x8 FHHL slot(s) 2 PCIe 4.0 x16 FHHL slot(s) (Slots 1 and 4 can convert to x16 by merging 2 and 3. Slots 1, 2, 4 and 5 can support FHFL cards with 1U heatsinks. Some slots share PCIe lanes with NVME. FH = Full Height, LP = Low Profile, FL = Full Length, HL = Half Length, DW = Double Width, SW = Single Width)
On-Board Devices	SATA: SATA3 (6Gbps); RAID 0/1/5/10 support NVMe: NVMe; RAID 0/1/5/10 support (*VROC is required) Chipset: Intel® C621A Network Connectivity: with Advanced IO Module, AIOM (OCP 3.0 NIC, refer to AIOM Network Card(s) under Optional Parts List for options) IPMI: Support for Intelligent Platform Management Interface v.2.0 IPMI 2.0 with virtual media over LAN and KVM-over-LAN support
Input / Output	LAN: 1 Dedicated IPMI LAN port USB: 2 USB 3.0 port(s) (2 rear) Video: 1 VGA port(s) Serial Port: 1 COM Port(s) (1 rear) DOM: 1 SuperDOM (Disk on Module) port

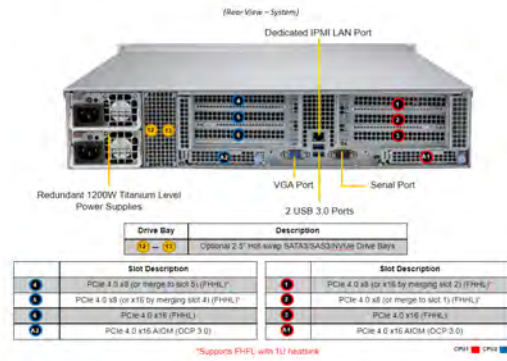

System Cooling	3x 8cm heavy duty fan(s)
Power Supply	1U 1200W/1000W Titanium Power Supply W/PMbus W76xL336xH40mm Dimension (W x H x L): 76 x 40 x 336 mm Output Type: 19 Pairs Gold Finger Connector
System BIOS	BIOS Type: AMI 32MB SPI FLASH ROM
Management	SuperDoctor® 5; Watch Dog; NMI; SUM; KVM with dedicated LAN; SPM; Intel® Node Manager; SSM; IPMI 2.0; Redfish API; SCC
PC Health Monitoring	FAN: Fans with tachometer monitoring Status monitor for speed control Pulse Width Modulated (PWM) fan connectors Temperature: Monitoring for CPU and chassis environment Thermal Control for fan connectors CPU: Monitors for CPU Cores, Chipset Voltages, Memory. 8 Phase-switching voltage regulator
Dimensions and Weight	Height: 3.5" (89 mm) Width: 17.2" (437 mm) Depth: 25.5" (647 mm) Gross Weight: 69 lbs (31.3 kg) Net Weight: 35.3 lbs (16 kg) Packaging: 11.4" (H) x 26.4" (W) x 34.3" (D) Available Color: Black
Operating Environment	Operating Temperature: 10°C ~ 35°C (50°F ~ 95°F) Non-operating Temperature: -40°C to 60°C (-40°F to 140°F) Operating Relative Humidity: 8% to 90% (non-condensing) Non-operating Relative Humidity: 5% to 95% (non-condensing)
Motherboard	Super X12DDW-A6
Chassis	CSE-LA26AC12-R1K23AW