


ECM-ASL

Intel Atom® x7000RE series 3.5" Micro Module

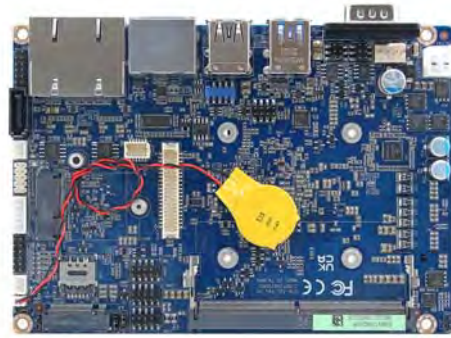

Product Features

- Onboard Intel® Processor N97, and Intel® Core™ i3-N305 Processor, Intel Atom® x7000RE series processors
- Triple Display, DP 1.4a, HDMI 2.0b, 1 x 2CH LVDS/eDP
- Dual Expansion Slot, M.2 Key-B, M.2 Key-E
- Bottom Layer Soldered Processor
- Dual Intel® Gigabit Ethernet, 2.5GbE
- DC in +9V ~ +36V

Specification

System Information

Processor	Onboard Intel® Processor N97, and Intel® Core™ i3-N305 Processor, Intel Atom® x7000RE series processors
System Memory	1 x 262-pin DDR5 4800MHz SO-DIMM socket, supports up to 16GB Max.
I/O Chipset	EC ITE IT5782VG
Watchdog Timer	H/W Reset, 1sec. ~ 65535sec and 1sec. or 1min./step
BIOS	AMI BIOS, 256Mbit SPI Flash ROM
H/W Status Monitor	CPU temperature monitoring Voltages monitoring CPU fan speed control
TPM	Onboard NuvoTon_NPCT750AADYX (for standard temp) & NPCT754AADYX (for extend temp) supports TPM 2.0
Board	3.5"

Expansion

Expansion	1 x M.2 Type B slot for 3042/3052/2242 size (PCIe x1+USB 3.2 GEN1 + USB 2.0) 1 x M.2 Type E 2230 support CNVi WiFi module (1 x PCI-e x1 & USB 2.0 Signal)
-----------	--

Storage

Storage	1 x M.2 (Type B) 1 x SATA III
----------------	----------------------------------

Display

Graphic Chipset	Intel® UHD Graphics
------------------------	---------------------

Spec. & Resolution	HDMI 2.0b Max resolution 4096 x 2160@60Hz DP 1.4a Max resolution 4096 x 2160@60Hz LVDS 1920 x 1080 Dual channel 18/24-bits/eDP1.3 Max resolution 4096 x 2160@60Hz
-------------------------------	---

Multiple Display	Triple Display
-------------------------	----------------

LVDS	1 x LVDS: 1920 x 1080 Dual channel 18/24-bits LVDS
-------------	--

Audio

Audio Codec	Realtek ALC888S HD Audio Decoding Controller
--------------------	--

Audio Interface	Line-in, Mic-in, Line-out
------------------------	---------------------------

Ethernet

LAN Chipset	2 x Intel® I226LM/I226IT
--------------------	--------------------------

Ethernet Interface	10/100/1000/2.5G Base-Tx GbE compatible
---------------------------	---

LAN Port	2 x RJ-45
-----------------	-----------

Power Requirement

Power Mode	AT/ATX (Default Setting: AT)
-------------------	------------------------------

Software Support

OS	Windows 11, Linux Note: Windows 11 is not a LTSC release and will be supported on the Intel CCG Client roadmap. NEX Network & Edge customers may install non-LTSC releases(e.g. Win11) on NEX Network & Edge processors.
-----------	---

Certification

Certification Information	CE, FCC Class, RoHS Compliant
----------------------------------	-------------------------------

I/O

USB	3 x USB 3.2 Gen2, 1 x USB 2.0 at IO 2 x USB2.0 by Pin header
------------	---

COM Port	3 x RS-232 1 x RS-232/422/485
-----------------	----------------------------------

SATA	1 x SATA III
-------------	--------------

DIO 1 x 8-bit GPIO

MIO 1 x eSPI
1 x SIM Card Slot

Mechanical & Environmental

Operating Temp. Standard Temperature: 0°C ~ 60°C (-4~140°F) with 0.5m/s Air Flow
Extend Temperature: -40°C ~ 85°C (-40°F ~ 185°F) with 0.5m/s Air Flow for Wide Temp CPU SKU

Storage Temp. -40°C ~ 85°C (-40°F ~ 185°F)

Operating Humidity 40°C @ 95% Relative Humidity, Non-condensing

Weight 0.44lbs (0.2kg)

Power Requirement DC in +9V ~ +36V

Dimension (L x W) 5.7" x 4" (146mm x 101mm)

Ordering Information

Ordering Information TBC
